

Miniature OEM Wireless Digital Data Link

The all new pMDDL900 Digital Data Link is a miniature OEM, high power, 2x2 MIMO 900 MHz wireless OEM solution that provides the bandwidth and range needed for complex data intensive applications. The Pico MIMO DDL features 2x2 MIMO Digital Data Link, using Maximal Ratio Combining (MRC), Maximal Likelihood (ML) decoding and Low-Density Parity Check (LDPC) to achieve robust RF performance. The pMDDL features secure & simultaneous Ethernet and Serial Data communications.

2X2 MIMO


Up to 21 Mbps

Small Footprint

Ethernet + Serial

PTP | Multipoint | Relay

Only 7 grams!

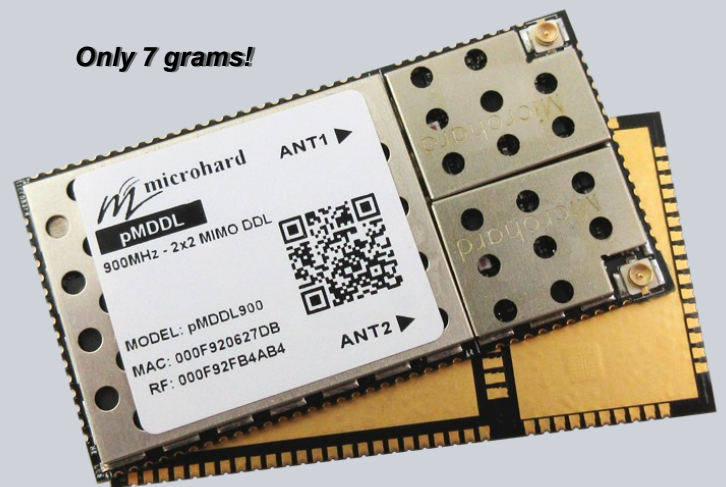

1.3" X 2.0" X 0.11"

pMDDL Features

- Robust 2X2 MIMO 900 MHz Operation
- Maximal Ratio Combining (MRC), Maximal Likelihood (ML) decoding
- Low-Density Parity Check (LDPC)
- Up to 21 Mbps Iperf Throughput @ 8 MHz channel (-78 dBm)
Up to 2 Mbps IPerf Throughput @ 4 MHz channel (-102 dBm)
- Extremely small foot print and very lightweight
- Serial Communication Port
- Dual 10/100 Ethernet Ports (LAN/WAN)
- Supports Point-to-Point and Point-to-Multipoint Networks
- Master, Remote, Relay Operating Modes.
- Adjustable total transmit power (up to 1W)
- Interface through local console, telnet, and web browser
- Local and remote wireless firmware upgrading through FTP

Interface Options



pMDDL900 Motherboard

Specifications

Frequency	902 - 928 MHz	Optimal Performance Specifications			
Error Detection	32 bits of CRC, ARQ	Modulation	IPerf Throughput (Mbps)	Optimal MRC Sensitivity (dBm)	Total Tx Power (dBm) +/- 1dB
Encryption (Requires Export Permit)	128-bit AES	8 MHz (2X2 MIMO ON)			
Ports Serial Data/Console Ethernet USB	RS232 TTL level (300bps to 921kbps) Dual 10/100BaseT IEEE802.3 (LAN/WAN) 2.0 (Future Development)	BPSK_1/2	3.1	-99.5	30dBm
		QPSK_1/2	6.0	-98	30dBm
		QPSK_3/4	8.4	-96	30dBm
		16QAM_1/2	10.7	-92	30dBm
Firewall	Port Forwarding, Access Control, IP/MAC List.	16QAM_3/4	14.8	-90	30dBm
Operating Modes	Point-to-Point, Point-to-Multipoint, Relay	64QAM_2/3	18.1	-85	30dBm
		64QAM_3/4	19.0	-83.5	30dBm
Diagnostics	Remote Diagnostics, Ping, Traceroute, ARP table, DHCP active leases, IPerf, RSSI	64QAM_5/6	21.0	-81	30dBm
		4 MHz (2X2 MIMO ON)			
Management	Local Serial Port Console, Telnet, WebUI, SNMP, FTP Upgrade, TFTP, CLI (Command Line Interface)	BPSK_1/2	1.57	-102.5	30dBm
		QPSK_1/2	3.0	-101	30dBm
		QPSK_3/4	4.3	-99	30dBm
		16QAM_1/2	5.4	-95.5	30dBm
Rejection	Excellent strong signal interference & rejection characteristics	16QAM_3/4	7.4	-93	30dBm
		64QAM_2/3	7.8	-88	30dBm
Input Voltage	Digital Voltage = 3.3V / RF Voltage = 4.2V	64QAM_3/4	8.0	-86	30dBm
		64QAM_5/6	10.0	-83.5	30dBm
Connectors:	Antenna: UFL x2 (ANT1, ANT2) Data: 116 Pin SMT	Modulation	IPerf Throughput (Mbps)	Optimal MRC Sensitivity (dBm)	Total Tx Power (dBm) +/- 1dB
Environmental Temperature Humidity	-40°F to 185°F (-40°C to +85°C) 5-95%, non-condensing	8 MHz (MIMO OFF)			
		BPSK_1/2	3.1	-96.5	30dBm
		QPSK_1/2	6.0	-95	30dBm
		QPSK_3/4	8.4	-93	30dBm
Weight	Approx. 7 grams	16QAM_1/2	10.7	-89	30dBm
		16QAM_3/4	14.8	-87	30dBm
Dimensions	Approx. 1.05" x 2.0" x .11" (26.5mm x 51mm x 2.8mm)	64QAM_2/3	18.1	-82	28dBm
		64QAM_3/4	19.0	-80.5	28dBm
Approvals	FCC IC	64QAM_5/6	21.0	-78	27dBm
		4 MHz (MIMO OFF)			
Order Options		BPSK_1/2	1.57	-99.5	30dBm
pMDDL900	2X2 MIMO 900 MHz OEM DDL Module	QPSK_1/2	3.0	-98	30dBm
		QPSK_3/4	4.3	-96	30dBm
		16QAM_1/2	5.4	-92.5	30dBm
		16QAM_3/4	7.4	-90	30dBm
		64QAM_2/3	7.8	-85	28dBm
		64QAM_3/4	8.0	-83	28dBm
		64QAM_5/6	10.0	-80.5	27dBm

Contact Information

Copyright 2019 Microhard Systems Inc.
Specifications subject to change without notice.

Microhard
150 Country Hills Landing N.W.
Calgary, AB, Canada T3K 5P3

Email: info@microhardcorp.com
Tel: (403) 248-0028
Fax: (403) 248-2762



www.microhardcorp.com