


High Performance 5G Cellular Ethernet/Serial Gateway w/ Dual Band AX WIFI

The BulletPlusAX-5G is a high performance, industrial strength, multi-network router for fixed and mobile applications. The BulletPlusAX-5G rugged 5G router/gateway features a Qualcomm Snapdragon Chipset and is capable of up to 3.4 Gbps download¹ and 900 Mbps upload¹, ideal for data hungry applications! The BulletPlusAX-5G features 4x Gigabit LAN Ports, Dual Independent Gigabit WAN Ports, Dual SIM w/Failover, Concurrent Dual Band 802.11ax WIFI, Dual Serial Ports, 2x Programmable I/O, and Standalone GPS.

5G

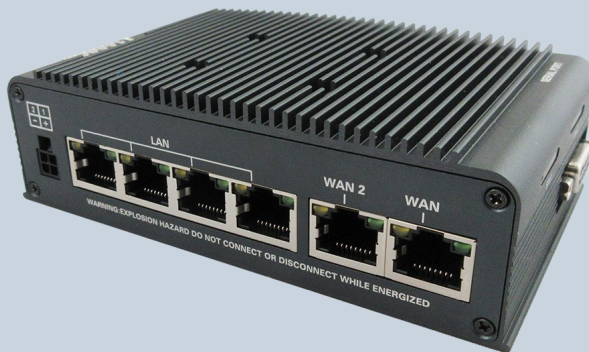

5G Cellular

6x Gigabit Ethernet Ports

Concurrent Dual Band WIFI

Dual Serial Ports

Dual SIM w/Failover

Features

- Ultra Fast 5G Operation with 4G/LTE Fallback
- Up to 3.4 Gbps Download / 950 Mbps Upload ¹
- Dual SIM Card Support w/Failover & Load Balancing
- Optional eSIM Support
- Concurrent Dual Band 802.11AX (2.4 & 5 GHz) WIFI
- Firewall with ACL Security, DMZ & Port Forwarding
- 2x Programmable I/O
- IPSec, GRE / VPN Tunneling
- RS232/485 Serial Data Port / RS232 Console/Data Port
- 5 - Gigabit Ethernet (4LAN/1WAN)
- IPv6 & IPv4 Support
- Standalone GPS (TCP/UDP/SMTP)
- Wide Operating Temperature (-40°C to +85°C)
- Data Usage Alerts (Email, SMS)
- User interface via SSH or HTTP/HTTPS web browser
- Microhard IoT (NMS) Portal Support



BulletPlusAX-5G Specifications



Cellular Data Rate (Max.) ¹				
5G SA Sub-6		DL 2.4 Gbps; UL 900 Mbps		
5G NSA Sub-6		DL 3.4 Gbps; UL 550 Mbps		
LTE		DL 1.6 Gbps; UL 200 Mbps		
WCDMA		DL 42 Mbps; UL 5.76 Mbps		
Cellular Frequency Bands				
5G NR	NSA	n1/ 2/ 3/ 5/ 7/ 8/ 12/ 13/ 14/ 18/ 20/ 25/ 26/ 28/ 29/ 30/ 38/ 40/ 41/ 48/ 66/ 70/ 71/ 75/ 76/ 77/ 78/ 79		
	SA	n1/ 2/ 3/ 5/ 7/ 8/ 12/ 13/ 14/ 18/ 20/ 25/ 26/ 28/ 29/ 30/ 38/ 40/ 41/ 48/ 66/ 70/ 71/ 75/ 76/ 77/ 78/ 79		
LTE	FDD	B1/ 2/ 3/ 4/ 5/ 7/ 8/ 12/ 13/ 14/ 17/ 18/ 19/ 20/ 25/ 26/ 28/ 29/ 30/ 32/ 66/ 71		
	TDD	B34/ 38/ 39/ 40/ 41/ 42/ 43/ 48		
	LAA	B46		
UMTS	WCDMA	B1/ 2/ 4/ 5/ 8/ 19		
Wi-Fi Features				
Modes	Access Point, Client, Repeater Concurrent 2.4 (802.11b/g/n) & 5 GHz (802.11a/n/ac/ax)			
Performance (2X2 MIMO)	Rate	Mode	Tx(dBm)*	Rx(dBm)
	6 Mbps	a	26	-94 ± 2
	54 Mbps	a	26	-80 ± 2
	1 Mbps	b	26	-95 ± 2
	11 Mbps	b	26	-90 ± 2
	6 Mbps	g	26	-94 ± 2
	54 Mbps	g	26	-80 ± 2
	MCS0	n (HT20)	26	-94 ± 2
	MCS7	n (HT20)	26	-76 ± 2
	MCS0	n (HT40)	26	-92 ± 2
	MCS7	n (HT40)	26	-73 ± 2
	MCS0	ac (VHT20)	26	-93 ± 2
	MCS8	ac (VHT20)	26	-71 ± 2
	MCS0	ac (VHT80)	26	-88 ± 2
	MCS9	ac (VHT80)	26	-66 ± 2
	*Total Tx power in dBm for 2 chains	MCS0	ax (VHT20)	26
MCS8		ax (VHT20)	26	-70 ± 2
MCS0		ax (VHT80)	26	-87 ± 2
MCS9		ax (VHT80)	26	-65 ± 2
Serial Ports				
Serial Interface	1x RS232/485 Serial Port, 1x RS232 Console Port Baud Rate: 300bps to 230kbps TCP Server/Client / UDP Server/Client / Modbus / SMTP			
Ethernet Ports				
LAN	4x RJ45 Ethernet Ports (10/100/1000 Gbps)			
WAN	2x RJ45 Ethernet Port (10/100/1000 Gbps)			
I/O				
	2x Programmable I/O			
USB				
	Type A USB 2.0 Host Mode			

GPS (Optional)	
Reporting	TCP/UDP/Email, GpsGate, TAIP
GNSS	GPS, GLONASS, BDS, Galileo, QZSS
GPS Protocols	NMEA 0183 V3.0
Acquisition Sensitivity	-145 dBm (Cold-start)
Tracking Sensitivity	-160 dBm (Open Sky/Active-patch Antenna)
Accuracy	<2m CEP-50 (Open sky, 1 Hz tracking)
Standalone time to first fix	1s/29s/32s (hot/warm/cold)
Total number of SVs	~55 SVs
Network	
Carrier Connection	ICMP Keep Alive, Traffic Watchdog, DDNS, Failover
Network Protocols	IPv4, IPv6, TCP, UDP, TCP/IP, ARP, ICMP, DHCP, HTTP, SNMP, FTP, DNS, Serial over IP, Modbus Slave (TCP/Serial), Load Balancer
Security	VPN, IPSec with IKE/ISAKMP; Multiple tunnel support (16); 3DES and up to 256-bit AES Encryption, VPN Tunneling L2TP, GRE, Open VPN, HTTPS, RADIUS
Management	Telnet, WebUI, SNMP V1/2/3, Wireless Upgrade (HTTP/FTP), AT Command Interface (Serial/Telnet), Microhard NMS Support, Data Usage Alerts, SSH
Diagnostics	RSSI, Ec/No, Voltage, Temperature, Remote diagnostics, UDP Event Reporting, SMS Alerts, Netflow
Host Interfaces	
Antenna	WiFi: 2x RPSMA Female Cellular: 4x SMA Female GPS: 1x SMA Female
Data	Ethernet: 6x RJ45 Serial/Console: 2x DE9 Female USB: Type A
SIM	2x Nano (4FF), eSIM (Optional)
Power, I/O	4 PIN Interlock
Input Voltage	
	7-30V _{DC} Reverse Polarity Protection
Environmental	
Operating Temperature	-40°C to +85°C
Humidity	5-95%, non-condensing
Dimensions	
Size	Approx. 5" x 3" x 1.5" (127mm x 76mm x 38mm)
Weight	Approx. 425 grams
Approvals	
	FCC/ISED(IC) PTCRB RoHS Compliant
Order Options	
Model	BulletPlusAX-5G BulletPlusAX-5G-2

1. Chipset rated speeds



Microhard Systems Inc.
150 Country Hills Landing N.W.
Calgary, AB, Canada T3K 5P3

www.microhardcorp.com
 info@microhardcorp.com
 1-855-353-0028